

1x80 W Dimmable DALI LED driver

- DALI control input 1 % – 100 % dimming range
- Enhanced Hybrid dimming, with varying PWM frequency
- Current setting by software, Constant Light Output (CLO) and load recognition
- Suitable for use in emergency lighting
- Very high efficiency up to 0.94
- Ideal solution for closed luminaires where protection done with luminaire construction
- Long lifetime, up to 100 000 h



80 W
220 VAC – 240 VAC
50 Hz – 60 Hz



Connections



Current setting (p. 2)

Resistor R	output I_{out}
open	350 mA
0 Ω	700 mA

Note:

- Not suitable for load side switching operation.

Mains Characteristics

Voltage range	198 VAC – 264 VAC
DC range	176 VDC – 280 VDC, starting voltage > 190 VDC
Max mains current at full load	0.34 A – 0.44 A
Frequency	0 / 50 Hz – 60 Hz
Stand-by power	0.30 W

Load Output (non-isolated)

Output current (I_{out})	350 mA (default) – 700 mA
- Accuracy	$\pm 5 \%$
- Ripple	< $\pm 10 \%$ high frequency
U_{out} (max) (abnormal)	400 V
EOFx (EL use)	> 0.98

	I_{out} 350 mA	700 mA
P_{out} (max)	80 W	80 W
U_{out}	71 V – 228 V	35 V – 114 V
λ	0.98	0.98
Efficiency (η), max load	0.94	0.92

Operating Conditions and Characteristics

Highest allowed t_c point temperature	75 °C
Life time (90 % survival rate)	100 000 h, at $t_c = 65$ °C 70 000 h, at $t_c = 70$ °C 50 000 h, at $t_c = 75$ °C

Ambient temperature range	-20 °C ... +50 °C
Storage temperature range	-40 °C ... +80 °C
Maximum relative humidity	no condensation

Connections and Mechanical Data


Wire size	0.5 mm ² – 1.5 mm ²
Wire type	solid core and fine-stranded
Maximum driver to LED wire length	5 m
Weight	220 g
IP rating	IP20

Functional Description


- DALI memory bank functionality
- Adaptive overload protection up to 85 W
- Limited outrush current (1200 mA) during load change
- Programmable output current
- Multipurpose terminal; I[set],
- Constant Light Output CLO, up to 100 000 h, maximum 75 % reduction (default disabled)
- Full load recognition, automatic recovery
- High Efficiency

Note: See page 2 - 3 for dimensions and additional information

Load output

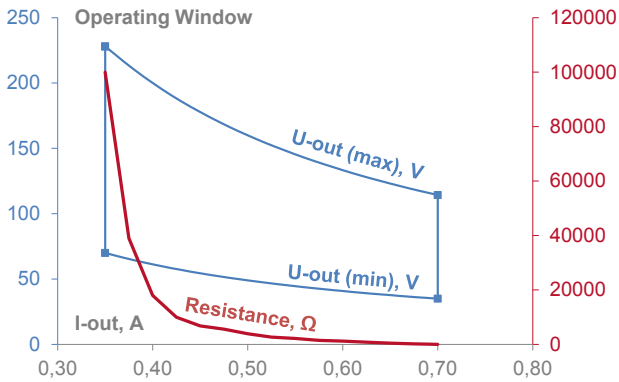

Hybrid dimming technique

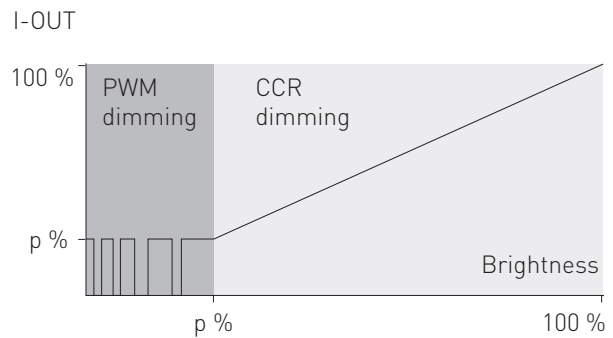


Dimming range	Dimming technique
1 % – 20 %	Pulse Width Modulation (PWM)*
20 % – 100 %	Constant Current Reduction (CCR)

* PWM dimming frequency 1 – 8 kHz

Current setting resistor values (Nominal I_{out} (±5 % tol.))

R (Ω)	0	220	470	820	1k2	1k5	2k2	2k7	3k9	5k6	6k8	10k	18k	39k	Open
I _{out} (mA)	700	675	650	625	600	575	550	525	500	475	450	425	400	375	350

Dimensions

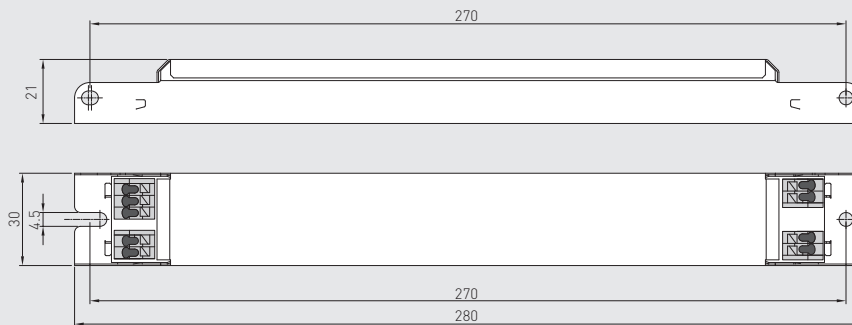

Quantity of drivers per miniature circuit breaker 16 A Type C

Based on I _{cont}	Based on I _{peak}	Typ.inrush current	1/2 value time, Δt	Calculated energy, I _{peak} ² Δt
30 pcs.	30 pcs.	42 A	186 μs	0.24 A ² s

LL1x80-DA-350-700 LED driver is suited for in-built luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Specifications of the LED drivers may never exceed the operating conditions as per the product datasheets.

Wiring

Wire type and cross section

Refer to datasheets connections & mechanical data

Wiring insulation

According to recommendations in EN 60598

Maximum wire lengths

Refer to datasheets connections & mechanical data

Wire connections

Refer to datasheets connections diagram

Miniature Circuit Breakers (MCB)

Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

LED driver earthing

- LED drivers are designed to support different luminaire classifications, such as Class I or Class II fittings (no earth required). Check the individual LED driver type for its exact safety class rating.
- For Helvar LED drivers to have a reliable operation and EMC performance, the luminaires are expected to have an earth connection.

Installation & operation

Maximum Tc temperature

Reliable operation and lifetime is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.

Installation site

- Ensure that the LED driver does not exceed temperature higher than specified on the product datasheets.
- The general preferred installation position of LED drivers for independent use is to have the top cover facing upwards.

Current setting resistor

LL1x80-DA-350-700 LED driver features an adjustable constant current output.

- An external resistor can be inserted in to the current setting terminal, allowing the user to adjust the LED driver output current.
- When no external resistor is connected, then the LED drivers will operate at their default lowest current level.

- A standard through-hole resistor can be used for the current setting. To achieve the most accurate output current it is recommended to select a quality low tolerance resistor.
- For the resistor/current value selection, refer to the table on page 2.
- For drivers not providing isolation (non-isolated), current setting resistor must be insulated according safety regulations.

Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Additional safety requirements for AC/DC supplied electronic controlgear for emergency lighting	EN 61347-2-13 Annex J
Thermal protection class	EN61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384
Digital addressing lighting interface	EN62386-207
Compliant with relevant EU directives	
ENEC and CE marked	